



Qi25

2-Way Dual 5" Installation Loudspeaker

The Quest Qi25 offers a dual 5-inch configuration in a refined two-way passive design engineered for balanced and efficient sound reproduction. Its architectural integration features a smooth front acoustic grille and a rotatable waveguide that provides consistent directivity. Designed to deliver robust output with extended mid-bass performance, the Qi25 is ideal for applications where both visual appeal and superior acoustics are paramount.


KEY SPECIFICATIONS

Impedance	8Ω
Transducers	1" HF & Dual 5" LF
Dispersion	120° x 80°
Horn	Rotatable
Power	250W RMS
Mounting	Horizontal & Vertical Brackets

*Quest Engineering reserves the right to make changes in specifications, or products without prior notice.




SPECIFICATIONS

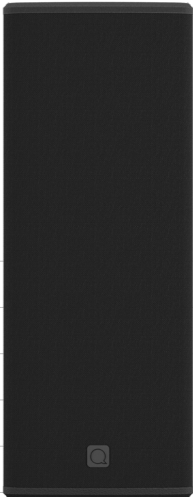

COLOURS	WHITE (RAL9003)	BLACK (RAL9004)
MODELS	Qi25W	Qi25
FREQUENCY RESPONSE (-6dB)	65Hz to 20kHz	
SENSITIVITY - 1W @ 1m	90.5dB	
MAXIMUM SPL @ 1m	120dB	
POWER HANDLING (RMS/PEAK)	250W / 500W	
NOMINAL IMPEDANCE	8Ω	
TRANSDUCERS	HF: 25mm (1") Compression Driver / 2 x LF: 127mm (5") Woofers	
DISPERSION (H° x V° -6dB)	120° x 80°	
ROTATABLE HORN	YES	
CONNECTIONS	4-Pin Euroblock/Phoenix Connector - 5.08mm Pitch (In/Thru)	
RIGGING POINTS	Yes	
DIMENSIONS (H x W x D)	440 x 170 x 200mm (17.6" x 6.6" x 7.9")	
WEIGHT	9.1kg (20 lb)	
SHIPPING WEIGHT	9.5kg (21 lb)	
SHIPPING DIMENSIONS (H x W x D)	515 x 270 x 240mm (20.3" x 10.6" x 9.5")	
CABINET MATERIAL & FINISH	Marine Plywood with Polyurea Coating	
GRILLE MATERIAL & FINISH	Steel mesh with Polyester Fiber Fabric	
RECOMMENDED POWER AMPLIFIER	Quest QX or QXD Amplifiers	
ACCESSORIES (INCLUDED)	Euroblock/Phoenix Connector, Cover Plate	
ACCESSORIES (AVAILABLE SEPARATELY)	Horizontal Bracket (HBRQi25) Vertical Bracket (VBRQi25)	

*Quest Engineering reserves the right to make changes in specifications, or products without prior notice.

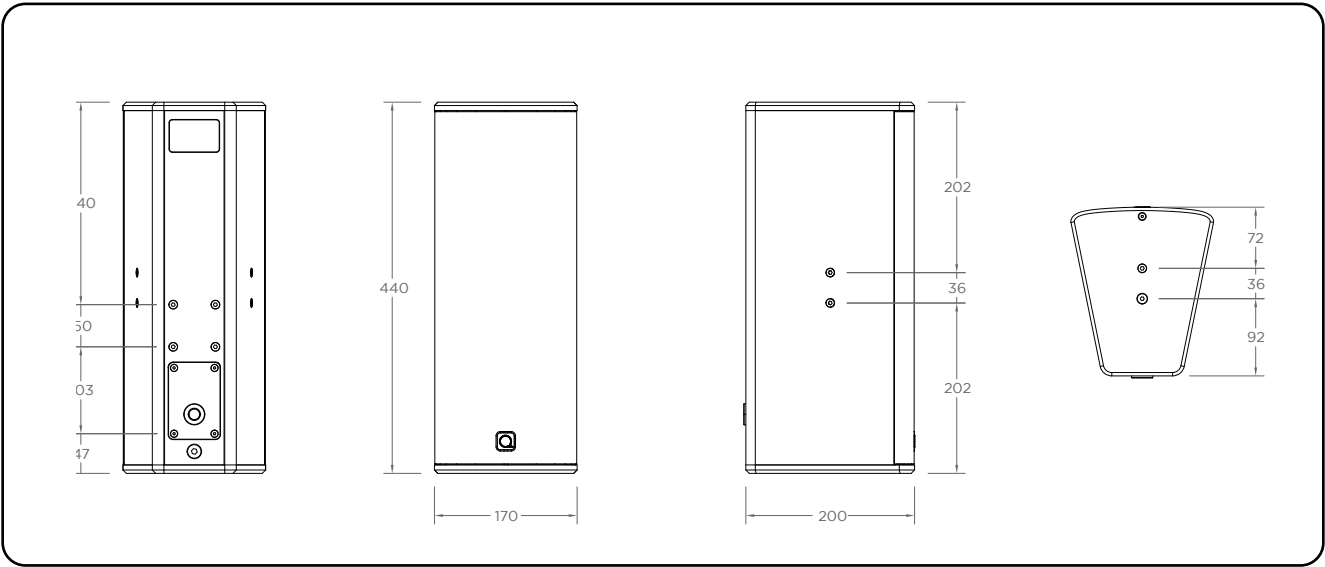

ACCESSORIES



HORIZONTAL BRACKET
HBRQi25



VERTICAL BRACKET
VBRQi25

Qi25

The loudspeaker system shall be a 2-way, full-range compact loudspeaker, housed within a marine plywood enclosure with Polyurea Coating. The cabinet will incorporate dual 127mm (5") Woofers coupled with a 25mm (1") Compression Driver with rotatable horn capability.

The loudspeaker will have a nominal impedance of 8 ohms and a power handling capacity of 250 W RMS, with a peak power rating of 500 W.

Its frequency response (-6 dB) will extend from 65 Hz to 20 kHz.

The sensitivity will be 90.5 dB SPL (1 W/1 m), with a maximum output of 120 dB SPL. The horizontal dispersion will be 120°, and the vertical dispersion will be 80°.

The enclosure will feature rigging points for installation flexibility.

The connection panel will incorporate 4-Pin Euroblock/Phoenix connectors with 5.08mm pitch to facilitate in/thru wiring. The grille will be constructed from steel mesh with Polyester Fiber Fabric and will be available in White (RAL9003) or Black (RAL9004).

The loudspeaker system will have overall dimensions of 440 mm (H) x 170 mm (W) x 200 mm (D) and a net weight of 9.1 kg.

Recommended amplification will be Quest QX or QXD Amplifiers.

The loudspeaker will include the Euroblock/Phoenix Connector and Cover Plate. Horizontal Bracket (HBRQI25) and Vertical Bracket (VBRQI25) will be available as optional accessories.

The loudspeaker will be the Qi25W (White model) or Qi25 (Black model) by Quest Engineering.

*Quest Engineering reserves the right to make changes in specifications, or products without prior notice.



questaudio.com.au